

Description

Triple shielded coaxial cable for Broadband Distribution Networks
75 Ohm
Triple shielded cable (Screening Class A++)



Data Sheet

TS27/115J



Ø	2,70	11,50	11,72	12,32	12,44	15,30
	(Cu)	(PEG)	(Al/Pet/Al/Sur)	(CuSn)	(Al/Pet J-foil)	(PE)

Class CPR acc. to UE 305/2011 (DoP)



The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/ 2011 for the class of performance specified on the related product label.

Standards

EN 50117-2-3

Fire-Resistance Rating

EN50575

Construction data

Inner conductor of plain copper	(Cu)	Ø 2,70 ± 0,10	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 11,50 ± 0,15	mm
Aluminium/Polyester/Aluminium/Surlyne tape longitudinally overlapped and bonded to the dielectric	(Al/Pet/Al/Sur)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		64	%
Tracer Identifier	Year + Flag		
Aluminium/Polyester j-fold and longitudinally overlapped	(Al/Pet J-foil)	50+4 x 30/19	mm/µm
Diameter over Braid		Ø 12,44	mm
Outer sheath of Polyethylene - black with two green bands - with carbonblack	(PE)	Ø 15,30 ± 0,20	mm
Printed each meter by yellow ink-jet :			

CAVEL TS 2.7/11.5 J MADE IN ITALY 75 Ohm Euroclass Fca EN50117-2-3 Class A++ CEI-UNEL 36762 C-4 (U0 = 400V) ULTRA HD / 4K ggaan m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

Physical data

Weight of copper conductors	83,50	kg/km
Total weight of cable	182,68	kg/km
Minimum bending radius (single/repeated bending)	200	mm
Maximum cable pulling strength	800	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

Electrical data

Characteristic impedance	200 MHz	75 ± 2	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		3,40	Ohm/km

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

12/05/2017

Responsible

PierPaolo Piccinini

Description

Triple shielded coaxial cable for Broadband Distribution Networks
 75 Ohm
 Triple shielded cable (Screening Class A++)

**Data Sheet****TS27/115J**

Outer conductor resistance		3,50	Ohm/km
Loop resistance		6,90	Ohm/km
Sheat Insulation voltage (spark test)		8	kV
Maximum current (Ieff)		25	A
Structural return loss (SRL)			
5 - 470 MHz	>25 dB		
470 - 1000 MHz	>24 dB		
1000 - 2000 MHz	>23 dB		
2000 - 3000 MHz	>22 dB		
Screening Attenuation (SA)	SA-Class A++	Shield Transfer Impedance (Zt)	Zt-Class A+
30 - 1000 MHz	>110 dB	5 - 30 MHz	< 1 mOhm/m
1000 - 2000 MHz	>105 dB		
2000 - 3000 MHz	>90 dB		

Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	0,78	862	7,71
10	1,00	1000	8,38
30	1,34	1350	9,92
50	1,73	1750	11,52
200	3,53	2150	12,80
300	4,34	2400	13,60
470	5,53	3000	15,40
800	7,40		

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date**12/05/2017****Responsible****PierPaolo Piccinini**

Description

Triple shielded coaxial cable for Broadband Distribution Networks
75 Ohm
Triple shielded cable (Screening Class A++)




Data Sheet

TS27/115J

Attenuazione di schermatura / Screening Attenuation

Cavo classe A++ / A++ Class cable

Cavo tipo / Cable type : TS 27/115 J

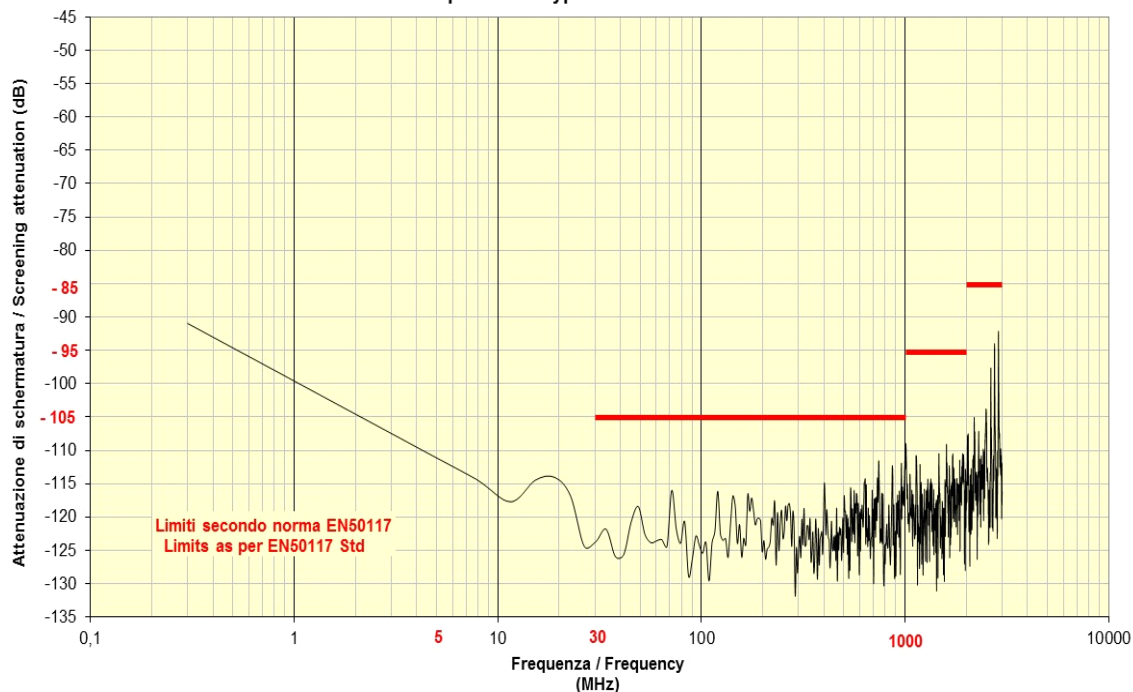

Connectors

- 3,5/12M-44** 3,5/12" connector, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 75,0 mm x 25,0 mm
- 5/8MU-44** 5/8" connector, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 75,0 mm x 25,0 mm
- FM-TL444** Series F, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 76,0 mm x 31,0 mm
- IEC14M-44** Series IEC (toolless), male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 75,0 mm x 25,0 mm
- SR21-44** Adapter, for 11/50FC - 27/115, for UNDERGROUND (Hardline) installation

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

12/05/2017

Responsible

PierPaolo Piccinini