


WISI DM 04 B

Splitter, 4-way

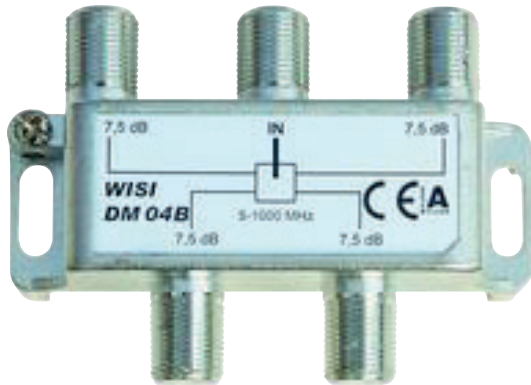

Description

The DM 04 B is a 4-way distributor which enables the symmetrical division of cable signals on 4 lines. The distribution attenuation is 7.5 dB. High shielding properties (class A) guarantee an interference-free transmission of the signals in the input and distribution systems. A fast and safe connection is ensured through F-sockets.

At a glance:

- Frequency range 5...1000 MHz
- Screening factor according to Class A
- High port isolation and return loss

WISI Communications GmbH & Co. KG

Wilhelm-Sihn-Str. 5-7
75223 Niefern - Oeschelbronn, Germany

Phone: +49 7233 66-280, Fax: -350
E-Mail: export@wisi.de

Technical Modifications reserved. WISI cannot be held liable for any printing error. 1. Oktober 2020, 9:30 vorm.

Technical data	
Frequency range	5...1006 MHz
Distribution loss	7.5 dB
Isolation	30 dB
Return loss	18 dB
Connectors	
F-female	5 pcs. (1x input, 4x output)
General data	
Screening factor	>85 dB (class A)
DC Bypass IN/OUT 1A/30V	No
Dimensions (width x height x depth)	78x50x28 mm
Sales unit	10 pcs.
Dimensions (WxHxD) sales unit	400 x 320 x 150 mm
Packaging volume sales unit	dm ³
Gross weight sales unit	0.08 kg
Shipping unit	100 pcs.
Dimensions (WxHxD) shipping unit	mm
Packaging volume shipping package	0.2 dm ³
Gross weight shipping unit	0.08 kg
EAN	4010056702984
Article number	70298
Customs tariff number	85437090